



TECHNICAL DATA

See reverse for
Technical Drawings

Featuring

Higher Line Pulls

Common Specifications

Freespool clutch	Pneumatic
Max. pulling force <i>Bottom rope layer</i> <i>Top rope layer</i>	25,000 lbs 16,300 lbs
Max. rope speed <i>Bottom rope layer</i> <i>Top rope layer</i>	22 ft/min 34 ft/min
Max. oil pressure Max. oil flow	2,400 psi 16 GPM
Rope diameter D/d Rope MBL (EN 14492-1) Number of rope layers	5/8" 15:1 50,000 lbs 5
Rope length Winch weight Rope weight	190 ft 475 lbs 135 lbs

Model Variations


	#6331-167 H25K	#6331-168 H25K
Under wound	X	X
Left hand	X	
Right hand		X

**MILITARY GRADE
WINCHES FOR YOUR
TOW EQUIPMENT**


Reliable, dependable, uncomplicated, and safer.

412.212.6769

UNDER WOUND LEFT HAND MODEL

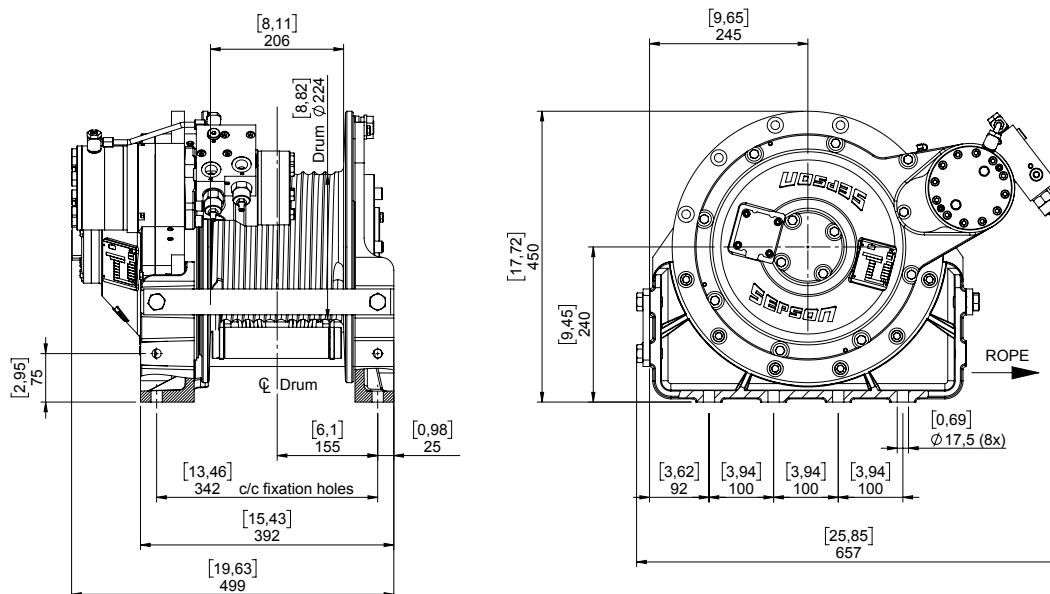

UNDER WOUND RIGHT HAND MODEL

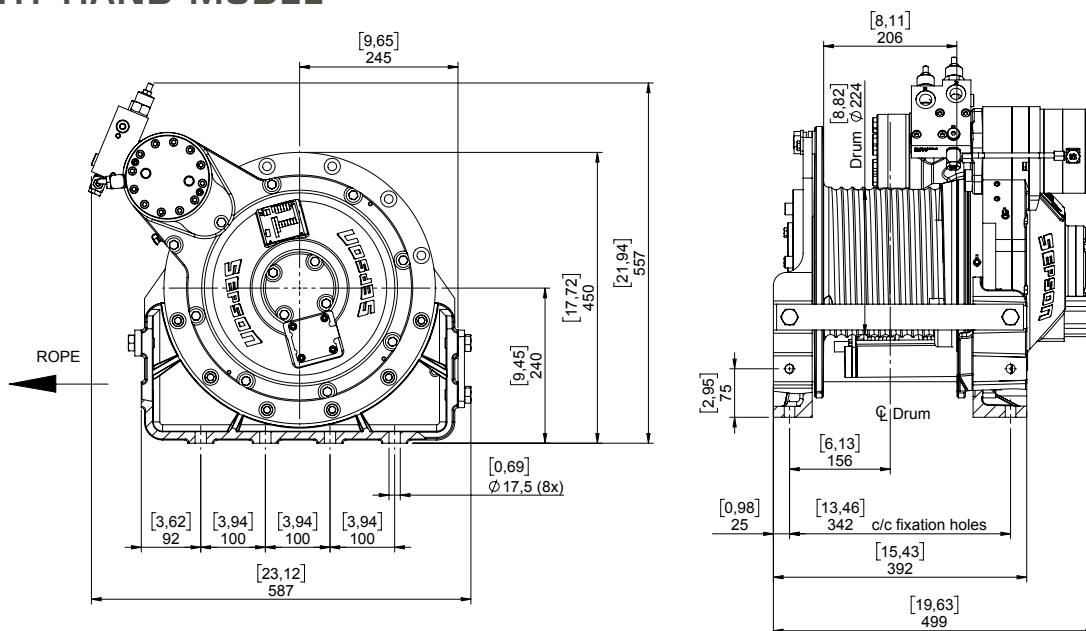

Compliant to EN 14492-1

**MILITARY GRADE
WINCHES FOR YOUR
TOW EQUIPMENT**

Reliable, dependable, uncomplicated, and safer.

412.212.6769

www.sepson-usa.com



facebook.com/sepsonusa



[@sepson_usa](https://instagram.com/sepson_usa)